


带法兰 齿型惰轮

— S2M · S3M型 —

Order 订货示例 型式 (1 Type · 2 齿数 · 3 对应皮带) **RD-SBT-F40S2M060**

■中心轴承型

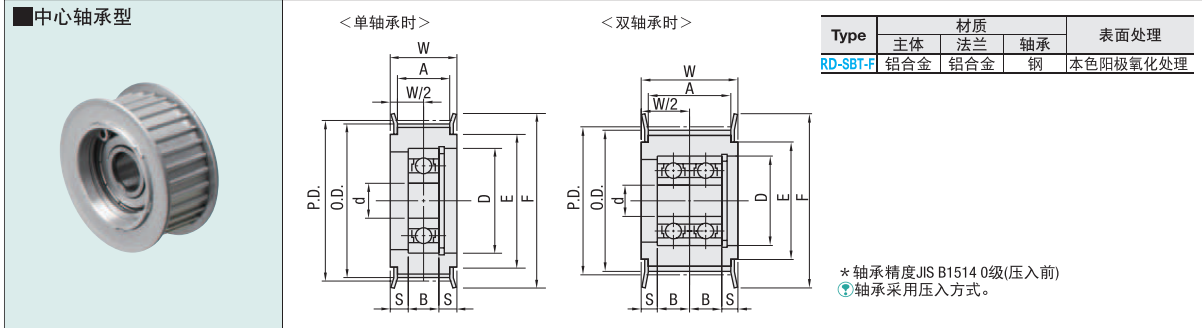

<单轴承时> <双轴承时>

| Type | 材质 | | | 表面处理 |
|----------|-----|-----|----|----------|
| | 主体 | 法兰 | 轴承 | |
| RD-SBT-F | 铝合金 | 铝合金 | 钢 | 本色阳极氧化处理 |

* 轴承精度JIS B1514 0级(压入前)
 Ⓞ 轴承采用压入方式。

■S2M型

| 1 Type | 2 齿数 | 3 对应皮带 | 轴径 d | P.D. | O.D. | F | E | A | W | S | 轴承尺寸 | | |
|----------|------|--------|------|-------|-------|----|----|----|----|-----|----------|----|---|
| | | | | | | | | | | | No. | D | B |
| RD-SBT-F | 40 | S2M040 | 5 | | | | | 5 | 9 | 2.5 | 695ZZ×1 | 13 | 4 |
| | | S2M060 | 6 | 25.46 | 24.96 | 30 | 20 | 7 | 11 | 3 | 696ZZ×1 | 15 | 5 |
| | | S2M100 | 11 | | | | | | 11 | 15 | 5 | | |
| | 48 | S2M040 | 6 | 30.56 | 30.05 | 35 | 25 | 5 | 9 | 2 | 696ZZ×1 | 15 | 5 |
| | | S2M060 | 7 | | | | | 7 | 11 | 3 | 698ZZ×1 | 19 | 6 |
| | | S2M100 | 8 | 31.83 | 31.32 | 35 | 25 | 7 | 11 | 2.5 | 698ZZ×1 | 19 | 6 |
| | 60 | S2M040 | 10 | 38.2 | 37.69 | 44 | 32 | 5 | 9 | 1.5 | 6900ZZ×1 | 22 | 6 |
| | | S2M060 | 7 | | | | | 7 | 11 | 2.5 | 6900ZZ×1 | 22 | 6 |
| | | S2M100 | 11 | | | | | 11 | 15 | 5 | | | |

■S3M型


| 1 Type | 2 齿数 | 3 对应皮带 | 轴径 d | P.D. | O.D. | F | E | A | W | S | 轴承尺寸 | | |
|----------|------|--------|------|-------|-------|----|----|----|----|-----|----------|-----|---|
| | | | | | | | | | | | No. | D | B |
| RD-SBT-F | 20 | S3M060 | 5 | 19.1 | 18.34 | 22 | 14 | 7 | 11 | 3 | 685ZZ×1 | 11* | 5 |
| | | S3M100 | 7 | | | | | 7 | 11 | 2.5 | 685ZZ×2 | | |
| | | S3M060 | 11 | | | | | 11 | 15 | 3.5 | 695ZZ×1 | 13 | 4 |
| | 24 | S3M060 | 5 | 22.92 | 22.16 | 25 | 16 | 7 | 11 | 3.5 | 695ZZ×2 | | |
| | | S3M100 | 11 | | | | | 11 | 15 | 3.5 | 695ZZ×2 | | |
| | | S3M060 | 5 | 23.87 | 23.11 | 28 | 18 | 7 | 11 | 3.5 | 695ZZ×1 | 13 | 4 |
| | 26 | S3M060 | 6 | 24.83 | 24.07 | 28 | 18 | 7 | 11 | 3 | 696ZZ×1 | 15 | 5 |
| | | S3M100 | 6 | 26.74 | 25.98 | 30 | 20 | 7 | 11 | 3 | 696ZZ×1 | 15 | 5 |
| | | S3M060 | 6 | 28.65 | 27.89 | 32 | 23 | 7 | 11 | 3 | 696ZZ×1 | 15 | 5 |
| | 30 | S3M060 | 6 | 28.65 | 27.89 | 32 | 23 | 7 | 11 | 3 | 696ZZ×1 | 15 | 5 |
| | | S3M100 | 11 | | | | | 11 | 15 | 4.5 | 626ZZ×1 | 19 | 6 |
| | | S3M060 | 8 | 30.56 | 29.8 | 35 | 25 | 7 | 11 | 2.5 | 698ZZ×1 | 19 | 6 |
| | 32 | S3M060 | 8 | 30.56 | 29.8 | 35 | 25 | 7 | 11 | 2.5 | 698ZZ×1 | 19 | 6 |
| | | S3M100 | 11 | | | | | 11 | 15 | 4.5 | 698ZZ×1 | 19 | 6 |
| | | S3M060 | 8 | 34.38 | 33.62 | 40 | 28 | 7 | 11 | 2.5 | 698ZZ×1 | 19 | 6 |
| | 36 | S3M060 | 8 | 34.38 | 33.62 | 40 | 28 | 7 | 11 | 2.5 | 698ZZ×1 | 19 | 6 |
| | | S3M100 | 10 | 38.2 | 37.44 | 44 | 32 | 7 | 11 | 2.5 | 6900ZZ×1 | 22 | 6 |
| | | S3M060 | 10 | 42.02 | 41.25 | 48 | 36 | 7 | 11 | 2.5 | 6900ZZ×1 | 22 | 6 |
| | 40 | S3M060 | 10 | 42.02 | 41.25 | 48 | 36 | 7 | 11 | 2.5 | 6900ZZ×1 | 22 | 6 |
| | | S3M100 | 10 | 45.84 | 45.07 | 50 | 38 | 7 | 11 | 2.5 | 6900ZZ×1 | 22 | 6 |
| | | S3M060 | 10 | 47.75 | 46.98 | 52 | 40 | 7 | 11 | 2.5 | 6900ZZ×1 | 22 | 6 |
| | 48 | S3M060 | 10 | 47.75 | 46.98 | 52 | 40 | 7 | 11 | 2.5 | 6900ZZ×1 | 22 | 6 |
| | | S3M100 | 10 | 57.3 | 56.53 | 61 | 46 | 7 | 11 | 2.5 | 6900ZZ×1 | 22 | 6 |
| | | S3M060 | 10 | 57.3 | 56.53 | 61 | 46 | 7 | 11 | 2.5 | 6900ZZ×1 | 22 | 6 |

指定加工 型式 (1 Type · 2 齿数 · 3 对应皮带) - (FC · NFC · LFC · RFC) **RD-SBT-F40S2M060 - FC28**

| Alterations Code | 法兰切割 FC | 不铆接法兰 NFC | 仅铆接单侧法兰 LFC · RFC |
|------------------|---|-----------------|---|
| Spec. | 切割法兰，降低高度。FC: 指定单位0.5mm Ⓞ 材质为不锈钢时不适用 Ⓞ 法兰外周未进行表面处理。 Ⓞ FC ≥ (O.D.) + 2 Ⓞ FC ≤ F - 2 [指定方法] FC28 | 发货时不铆接法兰。(附带法兰) | 发货时仅铆接扣环侧(RFC)或扣环相反侧(LFC)的单侧法兰。(附带1个法兰) |

Order 订货示例 型式 (1 Type · 2 齿数) - 3 适用皮带 - 4 轴径 **RD-SBT-FW32 - S3M100 - 8**

■两侧轴承型

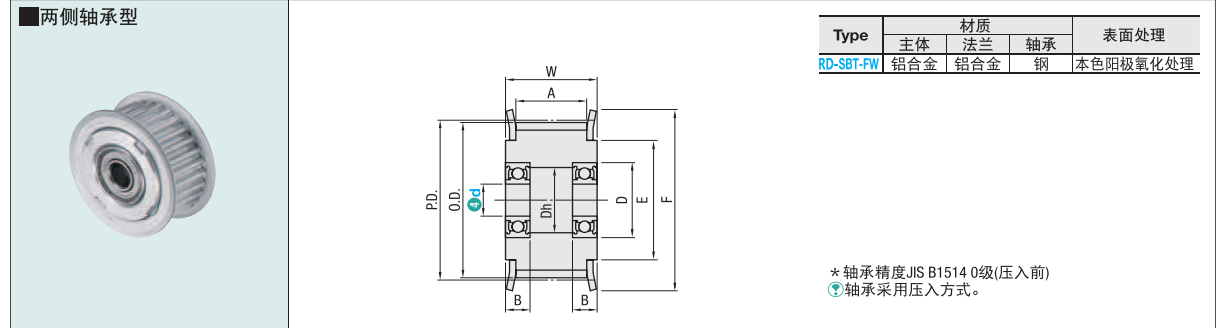

| Type | 材质 | | | 表面处理 |
|-----------|-----|-----|----|----------|
| | 主体 | 法兰 | 轴承 | |
| RD-SBT-FW | 铝合金 | 铝合金 | 钢 | 本色阳极氧化处理 |

* 轴承精度JIS B1514 0级(压入前)
 Ⓞ 轴承采用压入方式。

■S2M型

| 1 Type | 2 齿数 | 3 对应皮带 | 4 轴径 d | P.D. | O.D. | F | E | A | W | Dh | 轴承尺寸 | | |
|-----------|--------|--------|--------|-------|-------|----|----|----|------|---------|---------|-----|-----|
| | | | | | | | | | | | No. | D | B |
| RD-SBT-FW | 20 | S2M040 | 3 | 12.73 | 12.22 | 16 | 10 | 5 | 9 | 5 | 673ZZ×2 | 6 | 2.5 |
| | | S2M060 | 4 | | | | | 7 | 11 | 6 | 674ZZ×2 | 7 | |
| | | S2M100 | 11 | | | | | 11 | 15 | 6 | 673ZZ×2 | 6 | 2.5 |
| | 30 | S2M040 | 3 | 19.01 | 18.59 | 22 | 14 | 5 | 9 | 5 | 673ZZ×2 | 6 | 2.5 |
| | | S2M060 | 4 | | | | | 7 | 11 | 6 | 674ZZ×2 | 7 | |
| | | S2M100 | 11 | | | | | 11 | 15 | 6 | 673ZZ×2 | 6 | 2.5 |
| | 32 | S2M040 | 3 | 20.37 | 19.86 | 25 | 16 | 5 | 9 | 5 | 673ZZ×2 | 6 | 2.5 |
| | | S2M060 | 4 | | | | | 7 | 11 | 6 | 674ZZ×2 | 7 | |
| | | S2M100 | 11 | | | | | 11 | 15 | 9.5 | 694ZZ×2 | 11 | 4 |
| | 36 | S2M040 | 4 | 22.92 | 22.41 | 28 | 18 | 5 | 9 | 6 | 674ZZ×2 | 7 | 2.5 |
| | | S2M060 | 5 | | | | | 7 | 11 | 11 | 695ZZ×2 | 13 | 4 |
| | | S2M100 | 11 | | | | | 11 | 15 | 11 | 695ZZ×2 | 13 | 4 |
| 40 | S2M040 | 4 | 25.46 | 24.96 | 30 | 20 | 5 | 9 | 6 | 674ZZ×2 | 7 | 2.5 | |
| | S2M060 | 5 | | | | | 7 | 11 | 11 | 695ZZ×2 | 13 | 4 | |
| | S2M100 | 6 | | | | | 11 | 15 | 13 | 696ZZ×2 | 15 | 5 | |
| 48 | S2M100 | 8 | 30.56 | 30.05 | 35 | 25 | 11 | 15 | 16.5 | 698ZZ×2 | 19 | 6 | |
| | S2M100 | 8 | 31.83 | 31.32 | 35 | 25 | 11 | 15 | 16.5 | 698ZZ×2 | 19 | 6 | |
| | S2M100 | 8 | 38.2 | 37.69 | 44 | 32 | 11 | 15 | 16.5 | 698ZZ×2 | 19 | 6 | |

■S3M型

| 1 Type | 2 齿数 | 3 对应皮带 | 4 轴径 d | P.D. | O.D. | F | E | A | W | Dh | 轴承尺寸 | | |
|-----------|--------|--------|--------|-------|-------|----|----|----|------|----------|----------|----|-----|
| | | | | | | | | | | | No. | D | B |
| RD-SBT-FW | 20 | S3M060 | 3 | 19.1 | 18.34 | 22 | 14 | 7 | 11 | 5 | 673ZZ×2 | 6 | 2.5 |
| | | S3M100 | 4 | | | | | 11 | 15 | 6 | 674ZZ×2 | 7 | |
| | | S3M060 | 17 | | | | | 17 | 21 | 9 | 685ZZ×2 | 11 | 5 |
| | 24 | S3M060 | 5 | 22.92 | 22.16 | 25 | 16 | 7 | 11 | 11 | 695ZZ×2 | 13 | 4 |
| | | S3M100 | 11 | | | | | 11 | 15 | 11 | | | |
| | | S3M150 | 17 | | | | | 17 | 21 | | | | |
| | 25 | S3M100 | 6 | 23.87 | 23.11 | 28 | 18 | 11 | 15 | 13 | 696ZZ×2 | 15 | 5 |
| | | S3M150 | 17 | | | | | 17 | 21 | | | | |
| | | S3M100 | 6 | 24.83 | 24.07 | 28 | 18 | 11 | 15 | 13 | 696ZZ×2 | 15 | 5 |
| | 26 | S3M150 | 6 | 24.83 | 24.07 | 28 | 18 | 11 | 15 | 13 | 696ZZ×2 | 15 | 5 |
| | | S3M100 | 6 | 26.74 | 25.98 | 30 | 20 | 11 | 15 | 13 | 696ZZ×2 | 15 | 5 |
| | | S3M150 | 17 | | | | | 17 | 21 | | | | |
| | 30 | S3M100 | 6 | 28.65 | 27.89 | 32 | 23 | 11 | 15 | 13 | 696ZZ×2 | 15 | 5 |
| | | S3M150 | 17 | | | | | 17 | 21 | | | | |
| | | S3M100 | 6 | 30.56 | 29.8 | 35 | 25 | 11 | 15 | 16.5 | 698ZZ×2 | 19 | 6 |
| | 32 | S3M150 | 8 | 30.56 | 29.8 | 35 | 25 | 11 | 15 | 16.5 | 698ZZ×2 | 19 | 6 |
| | | S3M100 | 10 | 34.38 | 33.62 | 40 | 28 | 11 | 15 | 19.5 | 6900ZZ×2 | 22 | 6 |
| | | S3M150 | 17 | | | | | 17 | 21 | | | | |
| | 40 | S3M100 | 10 | 38.2 | 37.44 | 44 | 32 | 11 | 15 | 19.5 | 6900ZZ×2 | 22 | 6 |
| | | S3M150 | 17 | | | | | 17 | 21 | | | | |
| | | S3M100 | 10 | 42.02 | 41.25 | 48 | 36 | 11 | 15 | 19.5 | 6900ZZ×2 | 22 | 6 |
| | 48 | S3M150 | 10 | 42.02 | 41.25 | 48 | 36 | 11 | 15 | 19.5 | 6900ZZ×2 | 22 | 6 |
| | | S3M100 | 10 | 45.84 | 45.07 | 50 | 38 | 11 | 15 | 19.5 | 6900ZZ×2 | 22 | 6 |
| | | S3M150 | 17 | | | | | 17 | 21 | | | | |
| 50 | S3M100 | 10 | 47.75 | 46.98 | 52 | 40 | 11 | 15 | 19.5 | 6900ZZ×2 | 22 | 6 | |
| | S3M150 | 17 | | | | | 17 | 21 | | | | | |
| | S3M100 | 10 | 57.3 | 56.53 | 61 | 46 | 11 | 15 | 19.5 | 6900ZZ×2 | 22 | 6 | |
| 60 | S3M150 | 12 | 57.3 | 56.53 | 61 | 46 | 11 | 15 | 19.5 | 6900ZZ×2 | 22 | 6 | |
| | S3M100 | 12 | | | | | 17 | 21 | 25 | 6001ZZ×2 | 28 | 8 | |
| | S3M150 | 12 | | | | | 17 | 21 | 25 | 6001ZZ×2 | 28 | 8 | |

指定加工 型式 (1 Type · 2 齿数) - 3 适用皮带 - 4 轴径 - (FC · NFC · LFC · RFC) **RD-SBT-FW32 - S3M100 - 8 - NFC**

| Alterations Code | 法兰切割 FC | 不铆接法兰 NFC | 仅铆接单侧法兰 LFC · RFC |
|------------------|---|-----------------|---|
| Spec. | 切割法兰，降低高度。FC: 指定单位0.5mm Ⓞ 材质为不锈钢时不适用 Ⓞ 法兰外周未进行表面处理。 Ⓞ FC ≥ (O.D.) + 2 Ⓞ FC ≤ F - 2 [指定方法] FC28 | 发货时不铆接法兰。(附带法兰) | 发货时仅铆接扣环侧(RFC)或扣环相反侧(LFC)的单侧法兰。(附带1个法兰) |

交货期 报价确定

同步带轮 免键轴衬

同步带轮 免键轴衬