

# RD18Q.1.B系列 - 桥式不可打开

## Series of RD18Q.1.B-Bridge type non-opening



闭合状态：  
Opening type:

- Q** 桥式  
Bridge type
- F** 全封闭式  
Enclosed
- BF** 半封闭式  
Semi-enclosed

注：无字母为普通型  
Note: blank means general type

打开方式：  
Opening way:



- B** 不可打开  
Non-opening
- S** 双侧打开  
Open of both side
- W** 外侧打开  
Exterior opening
- N** 内侧打开  
Interior opening
- F** 无需打开  
Without opening

款式：  
Style:

- Q.B** 桥式不可打开  
Bridge type non-opening
- Q.N** 桥式内侧开  
Bridge type interior opening
- Q.W** 桥式外侧开  
Bridge type exterior opening
- Q.S** 桥式双侧可打开  
Bridge type both side opening
- BF.B** 半封闭不可开  
Semi-enclosed non-opening
- BF.N** 半封闭内侧开  
Semi-enclosed interior opening
- BF.W** 半封闭外侧开  
Semi-enclosed exterior opening
- BF.S** 半封闭双侧开  
Semi-enclosed both side opening
- F.N** 封闭内侧开  
Enclosed interior opening
- F.W** 封闭外侧开  
Enclosed exterior opening
- F.S** 封闭双侧开  
Enclosed both side opening

接头类型：  
Bracket type:



- X** 斜型接头  
Oblique bracket
- F** 方型接头  
Square bracket

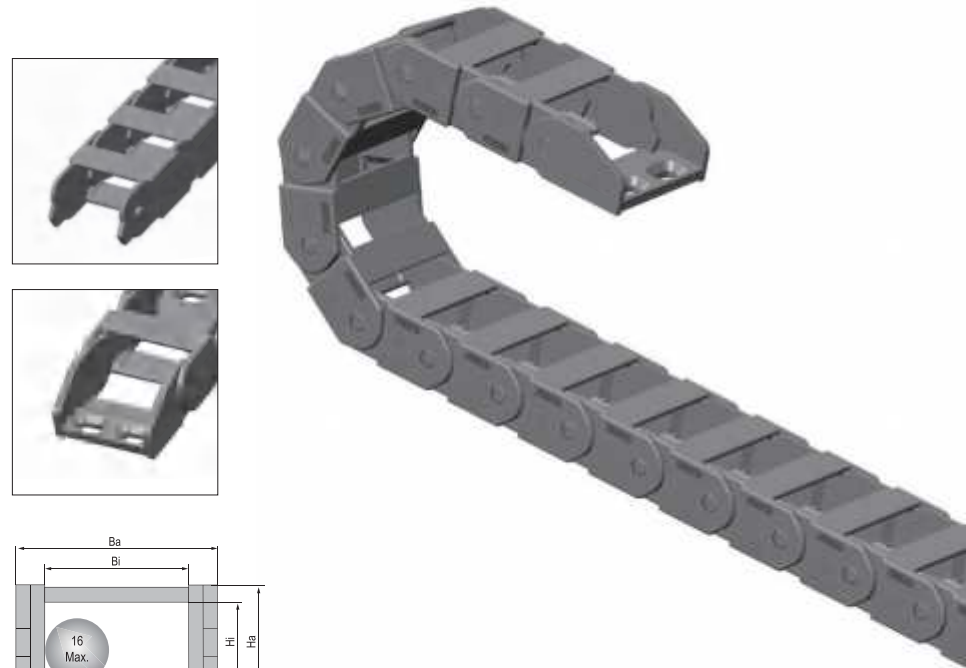

- ◎ The cable chain is low noise and smooth operation. Its tested service life is up to 20 million times.
- ◎ The cable chain can mount pectinate plate to fix cable better. (See accessories table)
- ◎ The cable chain is suitable for a diameter of 16mm or less of cable.

- ◎ 噪音低、运行流畅，测试使用寿命达 2 千万次
- ◎ 可配梳状板，更好的固定线缆（见选配区）
- ◎ 适用于直径 16 毫米以下线缆

### 主要技术参数 Basic technical data

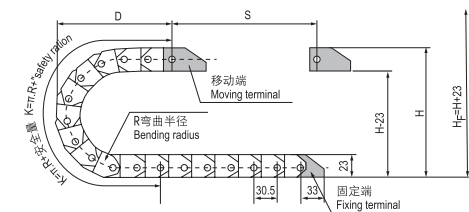

节距=30.5mm, 每米节数=33, 链长=S/2+K, S=行程距离, K=π.R+"安全量"  
Pitch=30.5mm, link per meter=33, length of chain=S/2+K, S=stroke, K=π.R+"safety ration"

R	28	38	48	75	100
H	79	99	119	173	223
D	70	80	90	117	142
K	153	183	214	305	397

安装实际高度:H<sub>1</sub>=H+23mm(负载 0.5kg/m)  
Actual mounting height:H<sub>1</sub>=H+23mm(load 0.5kg/m)

### RD18Q.1.系列 - 桥式不可打开 Series of RD18Q.1.B-Bridge type non-opening



系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters							代号 No.	
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						
									A	B	C	D	E		F
RD18Q.1.25B	18	25	23	36	Q.B	28,38,48,75,100	X <sub>2</sub>	5.2	14.5	33	7	36	RD18Q.1.25B-XJT		
RD18Q.1.37B	18	37	23	48	Q.B	28,38,48,75	X <sub>2</sub>	5.2*10L	20	33	7	48	RD18Q.1.37B-XJT		

注：B 表示不可打开  
Note: B indicates that non-opening

### 固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



### 订货示例 Order Sample

示例 拖链内高 18mm、内宽 25mm、半径 28mm、长度 1 米 /33 节 (Sample: inner height 18mm, inner width 25mm, radius 28mm, length 33 links/1 meter)

拖链 chain RD18Q.2.25N R28 1000mm /33 Links

接头 Bracket RD18Q.2.25N-XJT 副 (Set)

配件 Accessories

注：可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.